




ASSEMBLY INSTRUCTION

NC10FRX & NC10MRX | XLR Cable Connector

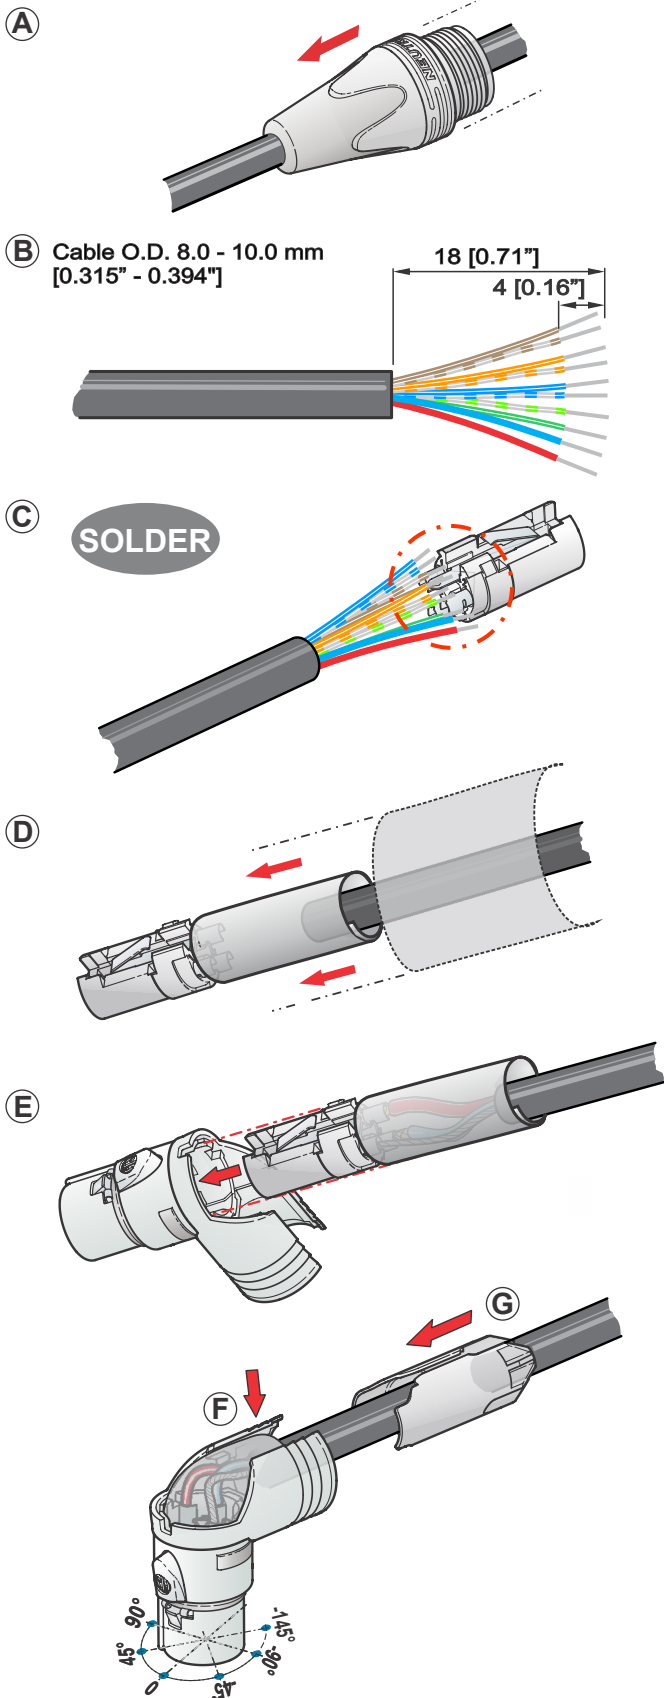

- (A) Slide the boot onto the cable.
- (B) Prepare the cable as shown.
- (C) Insert the wires into the terminals and solder them.


Wiring suggestion under consideration of EIA/ TIA 568 A/B.

Solder side!	Connection		PIN No.
	T568A	T568B	
Female	W - G	W - O	1
	G	O	2
	W - O	W - G	3
	BL	BL	4
	W - BL	W - BL	5
	O	G	6
	W - BR	W - BR	7
	BR	BR	8
Male	Power DC		
	+	-	9
			10


- (D) Position the sleeve over the wires.
- (E) Slide the insert into the housing until it snaps in place.
Align the insert with the housing.
- (F) Position the cable.
- (G) Slide the chuck into the housing.
Pay attention to position the chuck as shown.


5 selectable cable outlet positions on female & 7 position on male connectors.

Female:



Male:



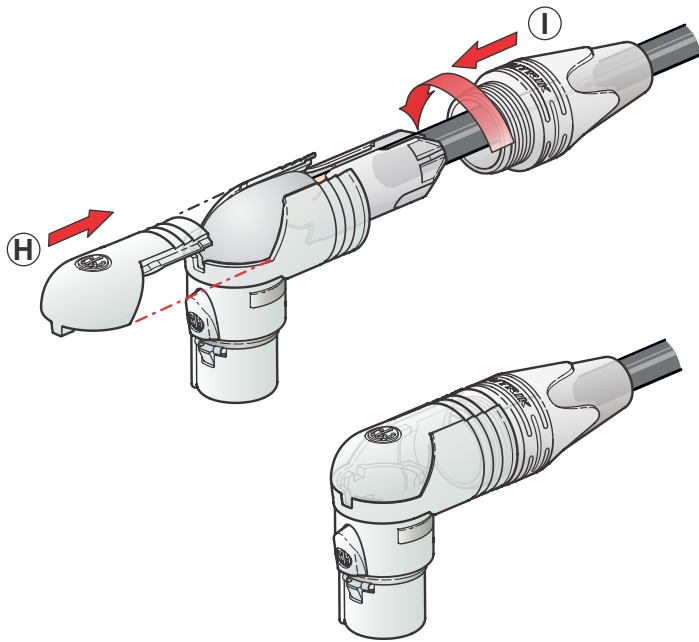


H Position the cover.

Before placing the cover choose the orientation of cable outlet by turning housing.

I Finish the assembly by turning the bushing onto the connector.

OPTION:

Use the handtool HTXX-14 to tighten the bushing.

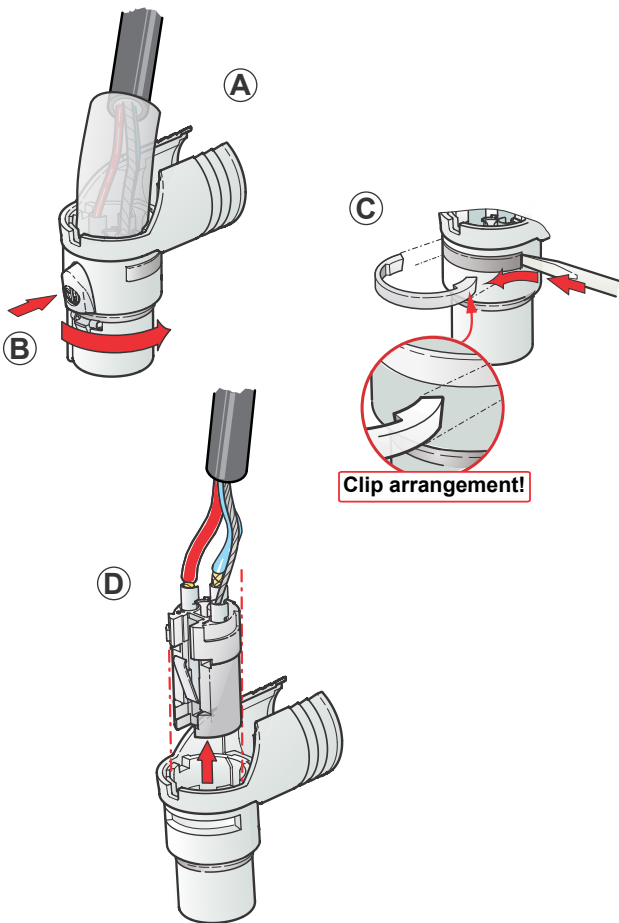

Disassembly of the insert

A Remove the cover and the chuck.

B Push the latch and turn the housing approx. a half turn until housing can be separated.

C Lift the locking clip by help of a screw driver.

D Remove the insert.

NEUTRIK AG LI T: +423/237 24 24 F: +423/232 53 93
 NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704/438 9202
 NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983/811 439
 NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131/280 830

NEUTRIK France FR T: +33 1/4131 6750 F: +33 1/4131 0511
 NEUTRIK Tokyo Ltd. JP T: +81 3/3663 4733 F: +81 3/3663 4796
 NEUTRIK Hong Kong Ltd. HK T: +852/2687 6055 F: +852/2687 6052
 NEUTRIK India Pvt. Ltd. IND T: +91/982 05 43 424 F: +91/22 26163 540

Draft. Nr.: BDA 484 | Update: 29.03.2016 | Data subject to change without prior notice. ©2016 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.