

Ordering Length

**NOTES:**

1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN

2 - OM3 - IL<0.35dB , RL>20dB , RL>50dB (APC) , 850nm & 1300nm  
 OS2 - IL<0.35dB, RL>50dB, 1310nm & 1550nm

IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
 RL CONNECTOR VALUE ACCORDING IEC 61300-3-6


3 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
 END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (APC polished)  
 END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (FLAT polished)

4 - TYPE OF POLARITIES ACCORDING TO SPECIFICATION SHEET

LENGTH TOLERANCE		
Length interval [m]		Tolerance [m]
1 - 7.99	+	0.11
	-	0
8 - 19.99	+	0.18
	-	0
20 - 49.99	+	0.23
	-	0
50 - 99.99	+	0.50
	-	0
100 - 199.99	+	1.00
	-	0
200 - 299.99	+	1.50
	-	0
>300	+	3.00
	-	0

**ORDERING CODE:**

**NKOP24X-A-0-X**

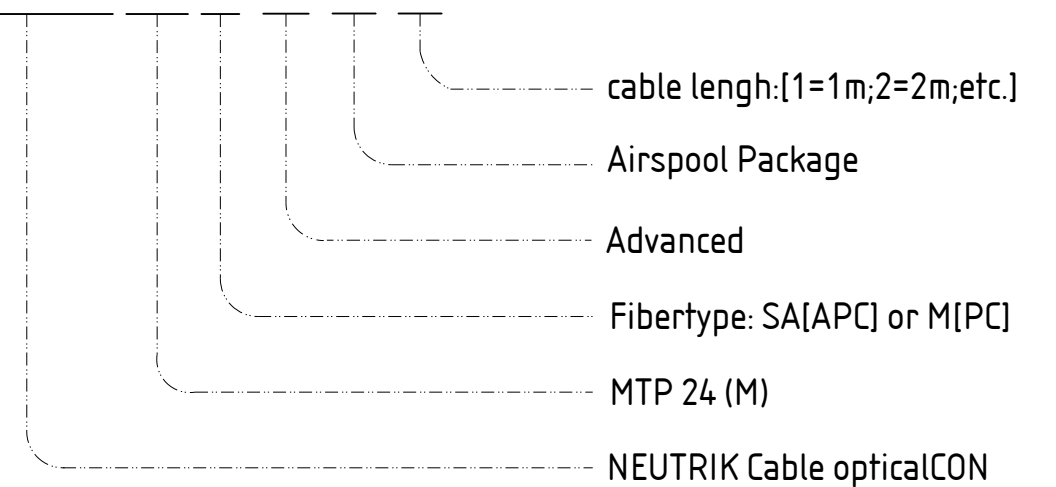

Sheet Number 1/1	Projection 	Scale 1:1	Format A3	General Tolerancing ISO 2768 mK	
Description			Created on/by 08.07.2024	Schuster R.	
MTP24 Patchcord			Approved on/by		
			Article ID	Model ID	Drawing ID
Status			Revision 1	ECN Number -	<b>Neutrik Group</b>